

CAST

ZipAccel-C

GZIP/ZLIB/Deflate Data Compression Core

ZipAccel-C is a custom hardware implementation of a lossless data compression engine that complies with the Deflate, GZIP, and ZLIB compression standards.

The core receives uncompressed input files and produces compressed files. No post processing of the compressed files is required, as the core encapsulates the compressed data payload with the proper headers and footers. Input files can be segmented, and segments from different files can be interleaved at the core's input.

The core's flexible architecture enables fine-tuning of its compression efficiency, throughput, and latency to match the requirements of the end application. Throughputs in excess of 100 Gbps are feasible even in low-cost FPGAs, and latency can be as small as a few tens of clock cycles.

ZipAccel-C offers compression efficiency practically equivalent to today's popular deflate-based software applications. Analyzing processing speed versus compression efficiency to achieve the best trade off for a specific system is facilitated by the included software model, and by support from our team of data compression experts.


ZipAccel-C has been designed for ease of use and integration. It operates on a standalone basis, off-loading the host CPU from the demanding task of data compression, and optionally from the task of encrypting the compressed stream. Streaming data interfaces and optional AMBA bus interfaces ease SoC integration.

Technology mapping is straightforward, as the design is scan-ready, microcode-free, and uses easily replaceable, generic memory models. Memory blocks can optionally support Error Correction Codes (ECC) to simplify achievement of Enterprise Class reliability requirements. Furthermore, input file segmentation can limit the inter-file latency and helps users achieve Quality of Service (QoS) objectives. The core has been rigorously verified and production proven in numerous commercial products.

Applications

The ZipAccel-C core is ideal for increasing the bandwidth of optical, wired or wireless data communication links, and for increasing the capacity of data storage in a wide range of devices such as networking interface/routing/storage equipment, data servers, or SSD drives. The core can also help reduce the power consumption and bandwidth of centralized memories (e.g. DDR) or interfaces (e.g. Ethernet, Wi-Fi) in a wide range of SoC designs.

Block Diagram

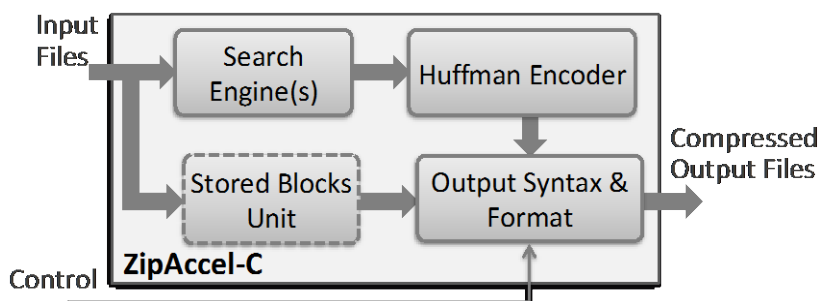

Features

Compression Standards

- Deflate (RFC-1951)
- ZLIB (RFC-1950)
- GZIP (RFC-1952)

Deflate Features

- LZ77 with configurable block and search window size
- Static and Dynamic Huffman
- Optional Stored Deflate Blocks
- Dynamic Mode Selection

Flexible Architecture

- Fine-tune Throughput, Compression Efficiency, and Latency to match application requirements
 - More than 100Gbps with one core instance, scalable to meet any throughput requirement
 - Compression efficiency can be on par with Unix/Linux max compression option (gzip -9)
 - Silicon requirements start from 20k gates
 - Under 15 clock cycles (Static Huffman)
- Configuration Options
 - Search Engine and Huffman Encoder blocks Architecture
 - History Search Window Size (up to 32KB)
 - Deflate Block Size
 - Deflate Blocks Support
 - Parallel Processing Level

Easy to Use and Integrate

- Processor-free, standalone operation
- Streaming-capable interfaces and optional AMBA bus wrappers
- Large file segmentation enables meeting QoS objectives
- Microcode-free, scan-ready design
- Optional ECC memories, necessary for Enterprise-Class RASM
- Optionally integrated with AES-XTS and AES-GCM encryption companion cores

Area and Performance

ZipAccel-C reference designs have been evaluated in a variety of technologies. ZipAccel-C performance can scale by instantiating more search engines and/or Huffman decoders. Furthermore, other design options such as the search area window affect the silicon resources utilization.

Over 100 Gbps throughputs are feasible, and the silicon footprint can be less than 100KGates. Contact CAST Sales for help defining likely configuration options and estimating implementation results for your specific system.

Verification

The core has been verified through extensive synthesis, place and route, and simulation runs. It has also been embedded in several commercially-shipping products, and is proven in both ASIC and FPGA technologies.

Deliverables

The core is available in ASIC (synthesizable HDL) and FPGA (netlist) forms, and includes everything required for successful implementation. The ASIC version includes:

- HDL (Verilog) RTL source code
- Sophisticated Test Environment
- Simulation scripts, test vectors and expected results
- Synthesis script
- Comprehensive user documentation

Support

The core as delivered is warranted against defects for ninety days from purchase. Thirty days of phone and email technical support are included, starting with the first interaction. Additional maintenance and support options are available.

Related Cores

- ZipAccel-D: GZIP/ZLIB/Deflate Data Decompression Core

CAST
info@cast-inc.com
www.cast-inc.com

CAST, Inc. 50 Tice Blvd, Suite 340
Woodcliff Lake, NJ 07677 USA
tel 201-391-8300 fax 201-391-8694

Copyright © CAST, Inc. 2017, All Rights Reserved.
Contents subject to change without notice.
Trademarks are the property of their respective owners.



The core is sourced from Technology
Partner Sandgate Technologies.