

JPEG 2000 solutions

From IP to fully integrated system

Unrivaled JPEG 2000 solutions

1080i 1080p UHDTV





2K 3D 4K 3D

Broadcast Profile





DCI **Profile**

Ultra low Latency





Lossless

High Quality





Multi Channel


Full set of configurations

- Multi-purpose
- Digital cinema DCI
- Broadcast multi-channel HD
- Ultra-high resolution 8K
- Sub-frame latency
- Multi-quality layered
- Mathematically lossless

Unique market expertise









barco-silex@barco.com

+32 (0)10 454 904

Barco Silex offers a comprehensive range of high quality solutions for JPEG 2000 applications. Our JPEG2000 portfolio covers a full set of IP cores, reference designs, acceleration boards and design integration services.

The Barco Silex JPEG 2000 encoder and decoder IP cores achieve unequalled quality and high-speed performance and are available on the latest generation FPGA's as well as on legacy platforms.

These remarkably flexible IP cores deliver real-time encoding or decoding of high-resolution and multi-channel video streams such as DCI 2K, 4K and 8K, HD 1080i and 1080p, UHDTV.

The unique architecture of our JPEG 2000 cores provides the highest standards of quality, flexibility, performance, compactness and reliability.

Performance

Real-time with multiple channels, high resolution and frame-rate.

Quality

Support of untiled images for 1080p, 2K, 4K and 8K with multiple layers and first-rate picture quality.

Flexibility

- Support for the widest spectrum of JPEG 2000 options, configurable frame size and easy to integrate interface.
- Upgradable during lifetime to new performance requirements or to a new generation of FPGA technology and footprint.
- Optimized and tailored cores to any application.

Compactness

- Cost-effective, single FPGA solution.
- Best trade-off between features, performance and footprint.

Reliability

Extensive market-adopted solution (live streaming and cinema theaters).

The Barco Silex JPEG 2000 cores surpass requirements of demanding applications such as acquisition, archiving, production, wireless video, contribution, digital cinema and have been widely adopted by the industry.



JPFG 2000 solutions

From IP to fully integrated system

v13.

Multi-purpose & flexible

The Barco Silex JPEG 2000 encoder and decoder cores are built on the flexible architecture of the BA110-FLEX encoder and BA109-FLEX decoder cores. These cores support the widest available spectrum of JPEG 2000 options available on the market.

Ultra-compact

The Barco Silex ultra-compact JPEG 2000 encoder and decoders are able to code untiled streams up to 1080p60 or 2K@48fps. They are easily integrated with video interfaces (HDMI, Ethernet ...) within the smallest FPGA devices.

- · Local video distribution
- KVM
- Broadcast
- DCI



Digital cinema (DCI)

The Barco Silex DCI JPEG 2000 encoder and decoder cores are compliant with the DCI recommendation. They support high-performance coding of large DCI frame formats: 2K up to 120fps, 2K-3D up to 120fps/eye, 4K up to 60fps, 4K-3D up to 60fps/eye.





Broadcast market

The Barco Silex broadcast JPEG 2000 encoder and decoder cores are compliant with the Broadcast Profile. They are ready for use according to VSF TR-01 recommendation including Ultra-Low Latency (ULL).



Multiple quality layers (MQL)

JPEG 2000 provides scalability in resolution and in quality. Progressive quality transmission enables to preview images with lower quality and to add quality layers afterwards. The Barco Silex Multi Quality Layers provides efficient code-streams which are progressive through up to 7+ layers.

- Document Imaging & Automation
- Remote Sensing
- Medical Information Systems





1.1% decoded – 0.030 bpp

13.0% decoded - 0.354 bpp

Ultra-high resolution (8K)

The Barco Silex ultra-high resolution JPEG 2000 encoder and decoder cores encode and decode image sizes up to 8K.

- UHDTV, 8K
- Future DCI
- Aerial & Geospatial Imagery

Ultra-Low Latency

The ultra-low latency JPEG 2000 solution of Barco Silex is ideal for real-time application. Our solution achieves end-to-end sub-frame latency for the total system. It is suitable for different markets such as professional AV, broadcast and military.

Mathematically lossless

The Barco Silex mathematically lossless JPEG 2000 encoder and decoder cores encode and decode images with color depths up to 16 bits, while mathematically preserving the quality of the original image.





BARCOVisibly yours



JPEG 2000 solutions

From IP to fully integrated system

v13.7

Technical features

Single-chip solution for multi-channel

- 720p30/60, 1080i, 1080p30/60, UHDTV
- 2K, 2K-3D, 4K, 4K-3D, 8K
- Custom frame sizes

Adjustable compressed bit rate

• Up to 8 Gbps, or lossless

Color spaces

- XYZ RGB YUV
- Optional ICT/RCT color transform

Color sub-sampling

• 4:4:4 - 4:2:2 - 4:2:0

Support a wide range of JPEG 2000 parameters

- Wavelet filters
 - o 9/7 (lossy) and 5/3 (lossless)
 - o 0 to 6 decomposition levels
- Full-frame processing (no tiling)
- Reduced latency (with tiling)
- Up to 16 bits per color sample
- Rate control with 3 selectable regulation modes
 - o Quality control with quantization and weights
- Multiple quality layers

Optimized memory controller for high efficiency

Typical configurations

E XILINX.		Spartan-6	Artix-7	Kintex-7	Kintex Ultrascale	Zynq
Compact HD 1080p at 30 fps	Decoder	75-1	75T-2	70T-1	035-1	7020-2
	Encoder	100-1	100T-2	70T-1	035-1	7020-2
DCI Stereoscopic 3D 2K at 60 fps	Decoder	-	75T-2	70T-1	035-1	7020-2
	Encoder	-	100T-2	160T-1	035-1	7020-2
UHD 4K at 60 fps	Decoder	-	-	160T-2	035-1	7035-2
	Encoder	-	-	160T-2	035-1	7035-2
Quad-channel HD 1080p at 30 fps	Decoder	-	200T-2	160T-1	035-1	7030-2
	Encoder	-	200T-2	160T-1	035-1	7030-2
High resolution 8K at 60 fps	Decoder	-	-	-	075-2	-
	Encoder	-	-	-	075-2	-
Lossless HD 1080p at 30 fps	Decoder	-	100T-2	70T-1	035-1	7030-2
	Encoder	-	100T-2	70T-1	035-1	7030-2
2K with MQL* at 60 fps	Decoder	-	100T-2	160T-1	035-1	7030-2
	Encoder	-	200T-2	160T-1	035-1	7030-2



		Cyclone V**		Arria V**	Arria 10	
		E	GX	GX	GX/SX	
Compact HD 1080p at 30 fps	Decoder	A4	C4	A1	160	
	Encoder	A5	C5	A1	160	
DCI Stereoscopic 3D 2K at 60 fps	Decoder	A5	C5	A3	160	
	Encoder	A7	C7	A3	160	
UHD 4K at 60 fps	Decoder	-	-	B1	160	
	Encoder	-	-	B1	160	
Quad-channel HD 1080p at 30 fps	Decoder	A7	C7	A3	160	
	Encoder	A7	C7	A3	160	
High resolution 8K at 60 fps	Decoder	-	-	-	570	
	Encoder	-	-	-	570	
Lossless HD 1080p at 30 fps	Decoder	A5	C5	A1	160	
	Encoder	A5	C5	A1	160	
2K with MQL* at 60 fps	Decoder	A7	C7	A1	160	
	Encoder	A7	C7	A3	160	

* Multiple Quality Layers ** Equivalent SoC devices also supported



BARCO-Visibly yours

Other configurations and FPGA available on request

Other configurations and FPGA available on request



JPEG 2000 solutions

From IP to fully integrated system

Electronic Design Services

- FPGA and ASIC
- **Embedded Software**
- Board/System



Video over IP OEM solutions

- HDMI Audio/Video networking over IP
- Ultra-low latency network distribution
- 4K video over a single 1Gb cable
- Unicast and Multicast distribution
- Image processing (scaling, logo insertion,...)

Video Platforms

- Video in/out (SDI, HDMI, Display Port)
- Processing (rotation, scaling, blending ...)
- JPEG 2000 and VC-2 HQ Compression
- Transport (MPEG-2 TS, SMPTE2022, RTP)
- Streaming (1Gb,10Gb ...)
- High efficiency Memory Controllers
- PCIe DMA for Video applications

Video compression IP cores

- JPEG 2000
- VC-2 HO
- **JPEG**
- MPEG-2

Security Platforms

- Key generation, Encryption & Authentication
- Secure Boot
- OpenSSL and Linux CryptoAPI support

Cryptography IP cores


- AES multi-purpose (ECB, CTR, CBC/CMAC, OFB, CFB)
- AES CCM (wireless, IPsec...)
- AES GCM (MACsec, IPsec...)
- AES XTS (disc storage ...)
- Public Key engine (RSA, ECC, ...)
- HASH & 3-DES core
- TRNG, DRNG (NIST800-90 compliant)

Barco Silex provides image processing and security solutions as well as electronic design services (ASIC, FPGA, DSP, embedded software, Board).

Barco Silex can interact at different stages in the development cycle of your products: from providing IP cores, reference designs and platforms, support on part of your integrated design to the delivery of full turnkey projects.

The unique combination of Barco Silex's image processing expertise and top-notch electronic design skills enabled many customers to accelerate their video product developments with leading-edge and cost-effective solutions. We are recognized for our state-of-the-art expertise in complex and high-speed design, for our project management skills and for our reliable design methodology.

Barco Silex's video platforms and reference designs integrate a full-range of compression and networking modules. They benefit equipment OEM's who need to accelerate the development of video solutions that can adapt to changes in critical standards, specifications and protocols. Our Video-over-IP reference design integrates the latest video over IP capabilities (SDI, SMPTE2022, JPEG 2000, MPEG-2 TS, 1&10Gb Ethernet).

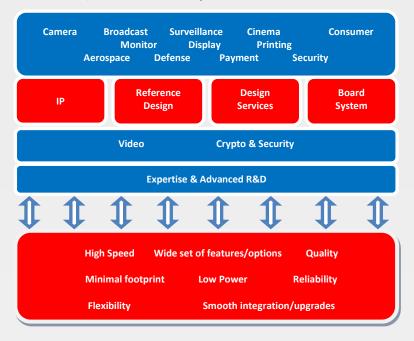

Barco Silex also provides security platforms and siliconproven **security IP** cores (AES, Public Key, Hash...), which are valued by the market for their world leading ultra-highspeed performance and compact footprint. They have been integrated in products for applications such as digital cinema block, media video streaming, communication, storage...



barco-silex@barco.com +32 (0)10 454 904

Technical specifications are subject to change without prior notice.

